



TEST REPORT

Mechanical & Hardgoods Lab.

Report No. : HL50484/2013

Page : 1 of 2

Date : MAY 30, 2013

PACIFIC EAGLE ENTERPRISE CO., LTD

No. 731, Shenzhou Rd. Shengang, Taichung, TAIWAN 42948

The following merchandise was submitted and identified by the applicant as:

Product Description: Neoprene-CR, 100%CR

Country of Origin: TAIWAN

We have tested the submitted sample(s) as requested and the following results were obtained:

Test Requested: For compliance with Federal Motor Vehicles Safety Standard No.302
Flammability of interior materials.


Test Result: --See following sheet(s)--

Date of Receipt: May 27, 2013

Testing Period: May 27 2013 ~ May 30, 2013

Conclusion: The submitted sample(s) **complies with** Federal Motor Vehicle Safety Standard No.302 Flammability of interior materials (49 CFR 571.302 10-1-11 Edition).

Signed for and on behalf of
SGS Taiwan Ltd.


Sturm Su
Asst. Manager

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

TEST REPORT

Test Result:

Sample	Char Length (mm)	After Flame (sec.)	Burn Rate (mm/min)	Pass
1.	0.0	0.0	0.0	
2.	0.0	0.0	0.0	
3.	0.0	0.0	0.0	
4.	0.0	0.0	0.0	
5.	0.0	0.0	0.0	
6.	0.0	0.0	0.0	

Note: SE/B = Self Extinguish with a burn rate in inches/minute Flame extinguishes itself before reaching the 38 mm point from the clamped end of the specimen.

SE/NBR = Self Extinguishing/No Burn Rate. The material stops burning before it has burned for 60 seconds from the start of timing and has not burned more than 51 mm inches from the point where timing was started.

D.N.I. = Does not ignite. The material does not support combustion during or following the 15 seconds ignition period.

Test Requirements:

The burn rate shall not exceed 102 mm per minute.

– Picture(s) –

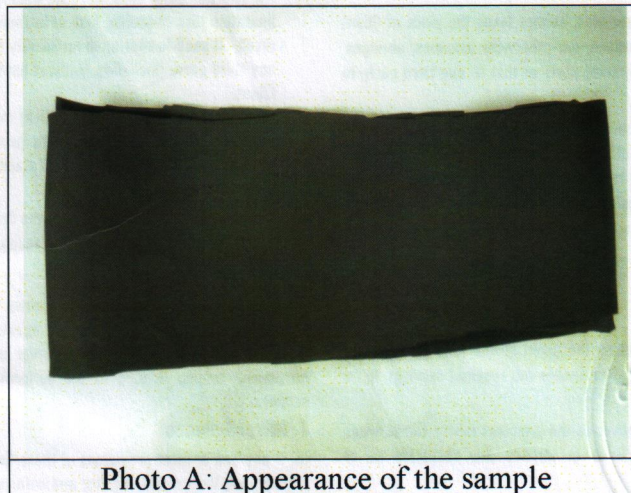


Photo A: Appearance of the sample

--- End of Report ---